
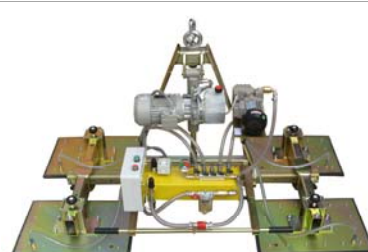


VACUUM LIFTERS

4 pad models

Standard Lifting Capacities	Available Power Systems	Load Movement
up kg 2000	✓ COMPRESSED AIR	✓ manual tilt 0°-90°
	✓ ELECTRIC AC 110v/220v/400v – DC 12v/24v	✓ pneumatic tilt 0°-90°
	✓ INDEPENDENT ELECTRIC VACUUM PUMP	✓ electric tilt 0°-90°
	✓ BATTERY	✓ fixed frame



Standard features	Available options
✓ sliding adjustable pads, individual pad shutoffs	➢ customized dimensions of pads and lifting capacities
✓ sliding pad arms (crossarm model)	➢ vacuum gasket seals for particular applications
✓ adjustable handle (on mod. M)	➢ low headroom frame
✓ vacuum tank with stopper for clearing	➢ economizer of compressed air or electric
✓ condensate discharge	➢ adjustable handle for mod. P / O
✓ on-off double sliding valve with safety	➢ hoist control support on handle
✓ two non-return valve	➢ battery charger (for battery powered models)
✓ filter of aspiration for dust and condense	➢ hoses for connection (vacuum and pneumatic)
✓ acoustic and visual alarm independently powered	➢ fittings or quick release connections
✓ vacuum gauge with colored scale	➢ 5th central pad
✓ lockable tilting at 0 and 90 degrees (on mod. M)	
✓ galvanized structure and varnished vacuum tank	

Vacuum Lifters with 4 pads

are available lifter with different LIFTING CAPACITY and DIMENSIONS OF PADS
specificare la disposizione di piastre – A CROCE o IN LINEA

Capacity (kg)	500	1000	1500	2000
Dimension of pad (mm)	480 x 230	480 x 330	630 x 380	630 x 430
Operating System / Movement				
COMPRESSED AIR				
Manual	M4A 500	M4A 1000	M4A 1500	M4A 2000
Pneumatic	P4A 500	P4A 1000	P4A 1500	P4A 2000
ELECTRIC AC with on board vacuum pump 110v/220v/400v – different Voltage on request				
Manual	M4EB 500	M4EB 1000	M4EB 1500	M4EB 2000
Pneumatic *	P4EB 500	P4EB 1000	P4EB 1500	P4EB 2000
Electric	O4EB 500	O4EB 1000	O4EB 1500	O4EB 2000
ELETTRICA DC with on board vacuum pump 12v or 24v **				
Manual / 12 Volt	M4EB12V 500	M4EB12V 1000	M4EB12V 1500	M4EB12V 2000
Manual / 24 Volt	M4EB24V 500	M4EB24V 1000	M4EB24V 1500	M4EB24V 2000
WITH INDEPENDENT ELECTRIC VACUUM PUMP (pump not included)				
Manual	M4E 500	M4E 1000	M4E 1500	M4E 2000
Pneumatic *	P4E 500	P4E 1000	P4E 1500	P4E 2000
Electric	O4E 500	O4E 1000	O4E 1500	O4E 2000
BATTERY POWERED, complete with ELECTRIC VACUUM PUMP 12 o 24 Volt **				
Manual / 12 Volt	M4B12V 500	M4B12V 1000	M4B12V 1500	M4B12V 2000
Manual / 24 Volt	M4B24V 500	M4B24V 1000	M4B24V 1500	M4B24V 2000

All models are available with FIXED FRAME (horizontal or vertical)

* for electric models with pneumatic tilt is necessary Compressed Air connection

** On request are available models with pneumatic or electric tilt

We reserve the right to make constructive amendments.